




1. Mount the socket to the PCB.  
2. Insert the IC package into the socket

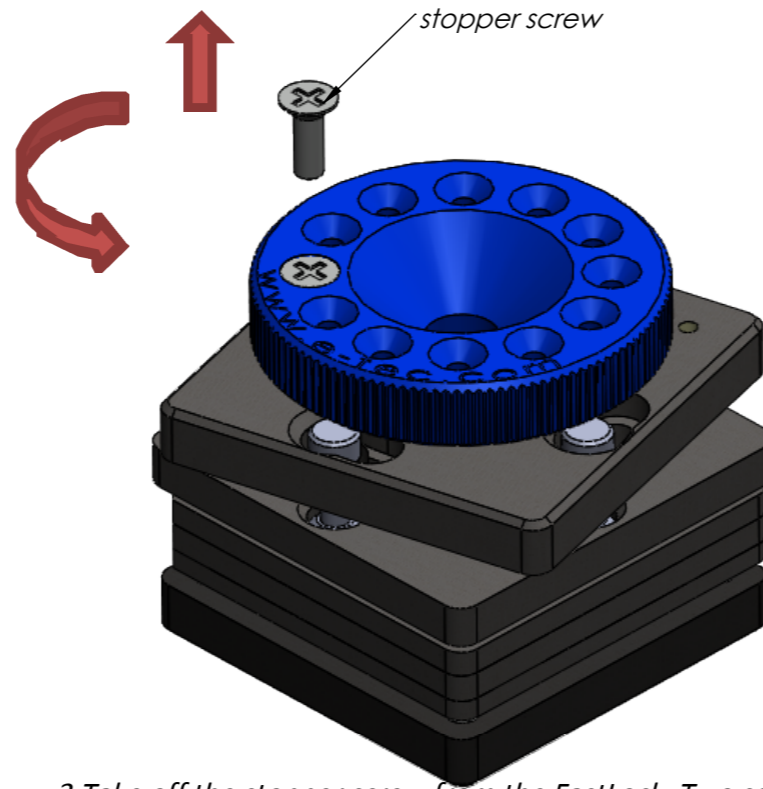


3. Take off the stopper screw from the FastLock. Two screws with different lengths are provided. Generally the shorter screw will be used for this stopper function, but in certain cases it may be necessary to use the longer screw  
4. Mount the FastLock retainer onto the posts by turning the top plate around 15°.

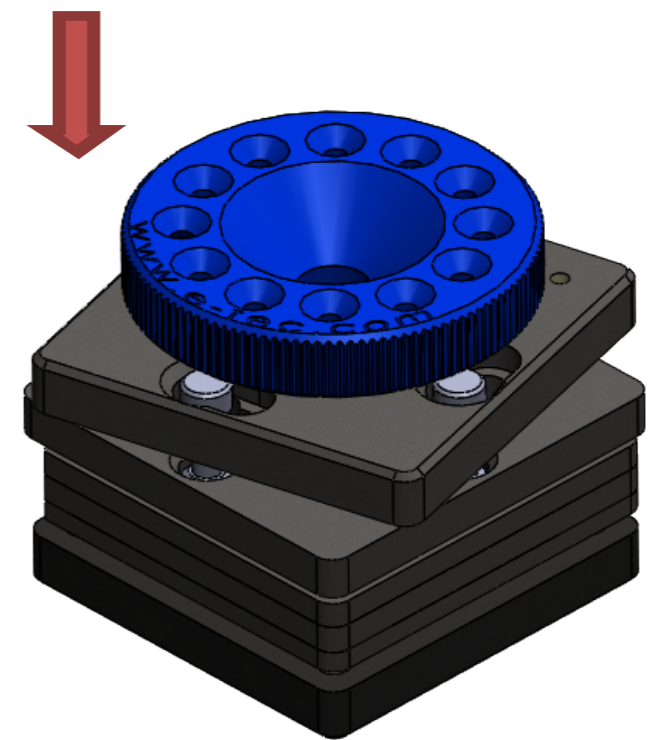

5. Place the chip on cavity and close the top plate perpendicular to the socket base.

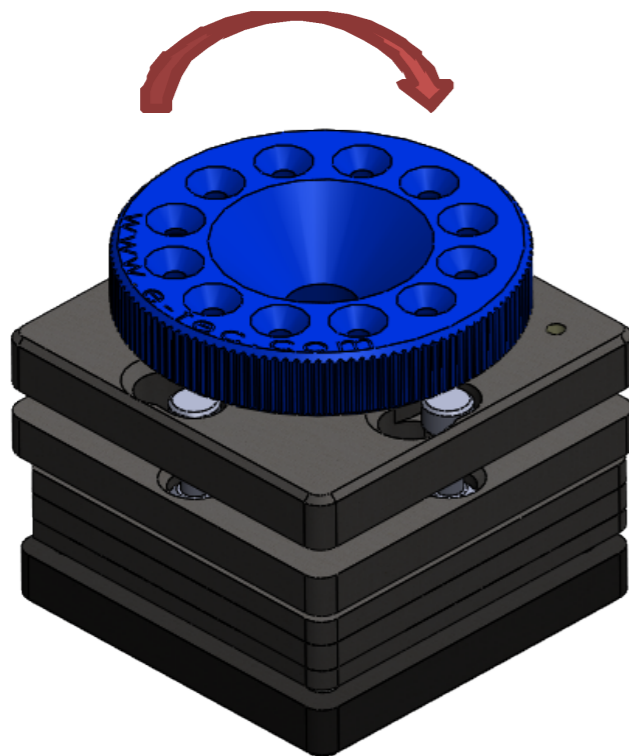


6. Turn the FastLock clockwise till reach the first resistance with the chip

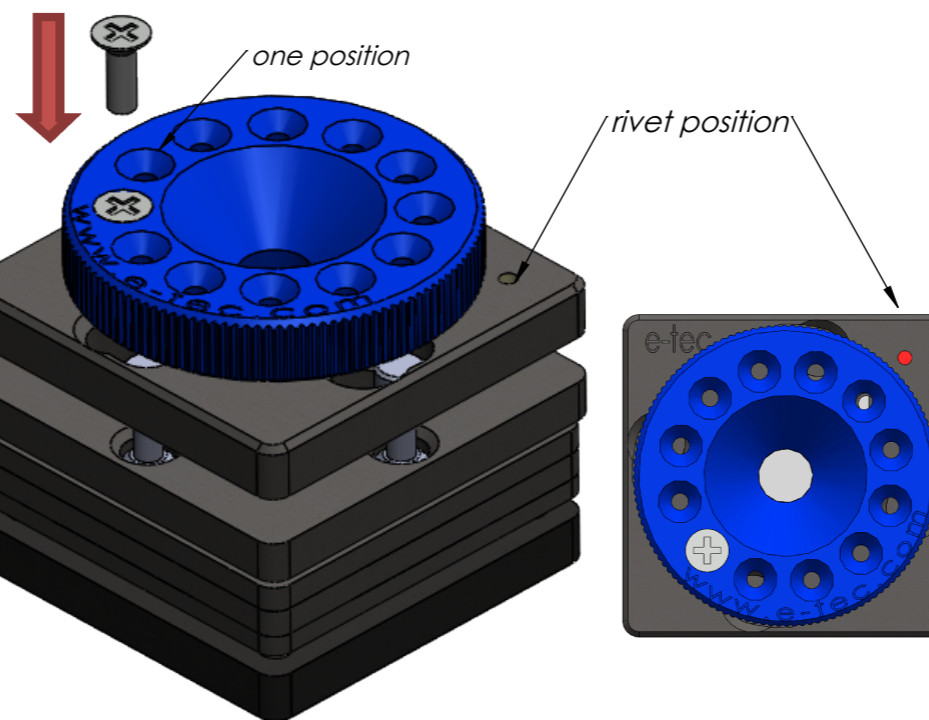

7. Tighten the stopper screw at the opposite rivet position to fix the FastLock at the desired pressdown position. If the screw is too short for this stopper action, then use the longer screw instead.

8. If you wish to readjust the pressdown forces, moving the stopper screw by one position (forward/backward) will decrease/increase the pressdown movement.

Optional torque tool fixture:  
If you wish to use this locking system with a torque tool, then please request a special torque tool fixture (metal bar with an allen key hole), which can be mounted to the FastLock retainer.  
Note: This is an optional fixture and needs to be ordered specifically.

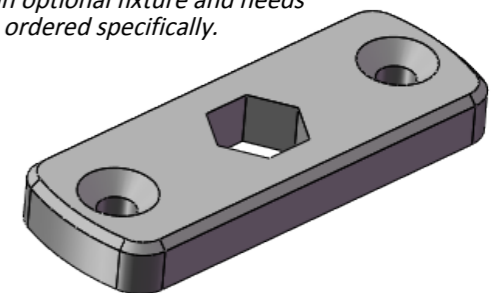

**NOTE: The FastLock can also be used without the stopper screw. If you do not wish to preset the pressdown forces then simply remove the screw from the FastLock retainer.**

<p><b>A3H</b> Scale 2:1</p> <p>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL TOLERANCES ISO 2768m</p> <p>patented</p> <p>The information contained in this drawing is proprietary to E-tec and shall not be reproduced or disclosed in whole or in part or used for any design or manufacture except with the user's possession direct, written authorization from E-tec</p>	REV 3	modif:	
	DRAWN sme	10.06.2009	NAME DATE
	REVD sme	25.08.2016	
	CHK'D -	-	
	APPV'D sme	25.08.2016	

<p><b>E-tec</b> Interconnect</p> <p>"E-tec order code"</p> <p>"Production code"</p> <p><b>Instructions user FastLock</b></p>	<p>Remark:</p>
--	----------------